


Control Keyboard

Features

- 3-AXIS Joystick for P/T/Z and simple manual operation
- Support CCTV system control
- Support 255 device on the control bus, included cameras or receivers
- One master controller can connect 31 slave controllers
- Control every function of cameras and P/T/Z Receivers on the control bus
- Remote control by RS-485
- User-friendly LCD display
- Protocol, communication parameter, controller ID and password via set-up menu

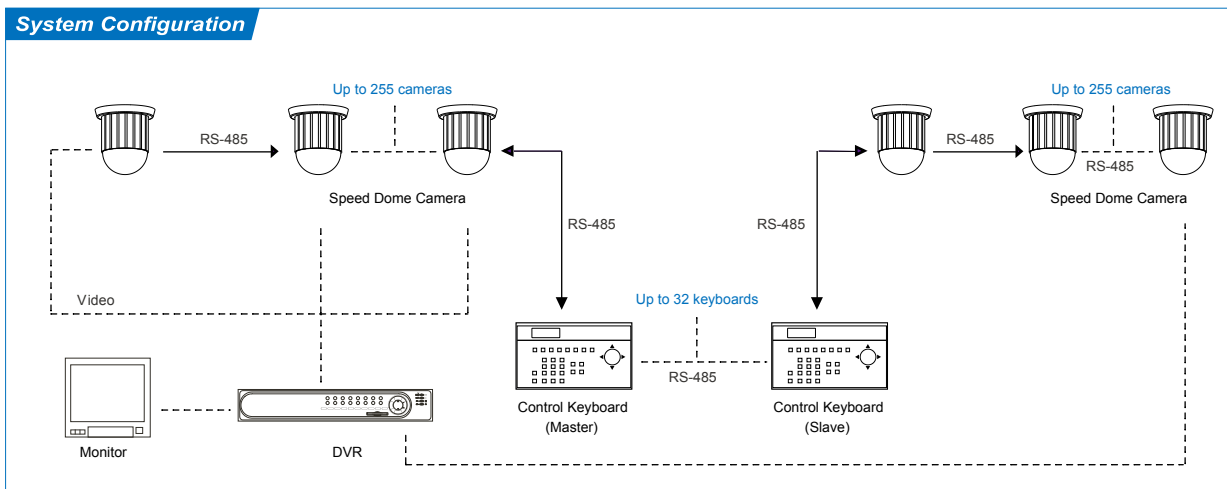

Model No.	RYK-8330	
Control Device	255 device	
Controller Interface	RS-485	
Data Speed	9600bps	
Pan/Tilt Control	Manual	Pan: Right / Left Tilt: Up / Down
	Auto	Pan: On / Off Sequence: On / Off
Lens Control	Zoom	Tele / Wide
	Focus	Near / Far / Auto
	Iris	On / Off / Auto
Camera Control	Preset Position	128 preset points
	Camera Setup	Available
Compatible Camera	Speed Dome, Zoom Camera with PELCO Protocol	
Power Supply	DC12V ± 10%	
Power Consumption	167mA max.	
Operating Temp.	-10°C ~ 40°C	
Dimensions (WxHxD)	269x190x53 mm	